


TRIGGER SPRAY TOP

Technical Drawing

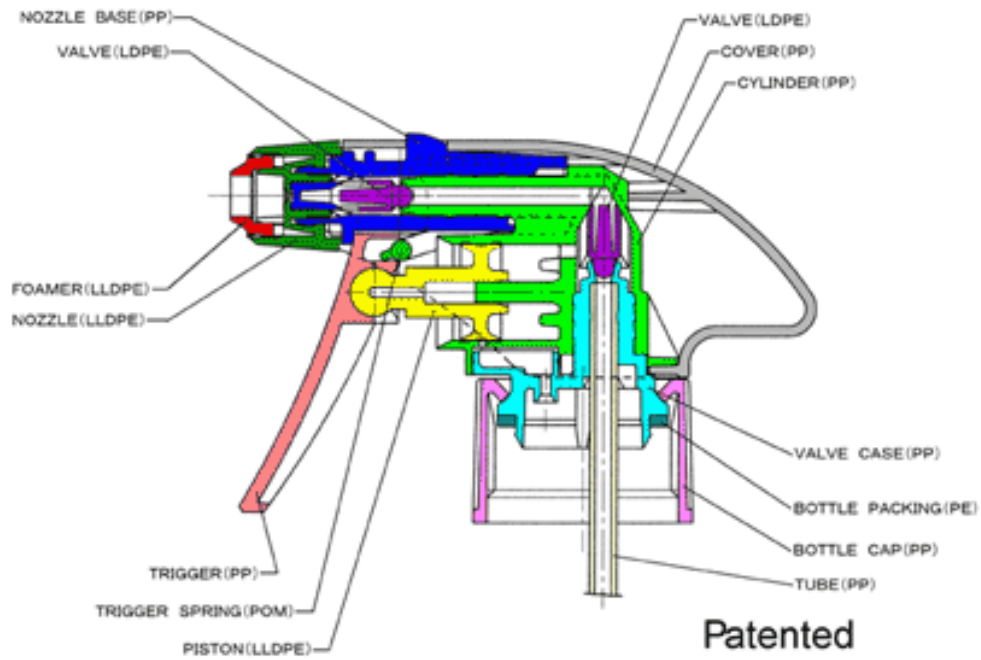

Technical Specification: T-95 Trigger Spray

Nozzle orifice	Ø 0.6mm
Spray output per stroke	1.0cc ± 0.1cc
Spray pattern	Ø 180mm ± 40mm
Spray Angle	48.6° ± 10°
Durability	More than 10,000 continuous trigger pulls (Water)
Weight	23.5 gram ± 1.5 gram (LB = 210mm)

Features:

- All Plastic Construction - high compatibility, recyclable and environmentally friendly.
- Loaded valves ensure a superior chatter free & multi-directional function for your product.
 - Aesthetically pleasing - unique appearance for your brand. Cover is customisable to further enhance your brand identity.
- Long trigger option allows easier usage, especially suited for professional markets.
 - 1.0ml output - rapid bottle emptying increases your sales.
- Foam only, spray only and spray/jet nozzle - giving a range of functional options for your product.
- External plastic spring (not in contact with liquid) - gives excellent compatibility and ensures there is no erosion of metal parts.
 - Child resistant closure option certified to ISO 8317 standard.
- Choice of closures giving you greater flexibility in choice of bottle - M28/410, M28/400, M28 LOCK, M28/400 Special.